


**COMPUBALLAST®: Best energy saving eBallasts**  
**Universal Voltage 95 to 265V Energy Miser**  
**Electronic Ballasts For 100W MH Lamps.**

---

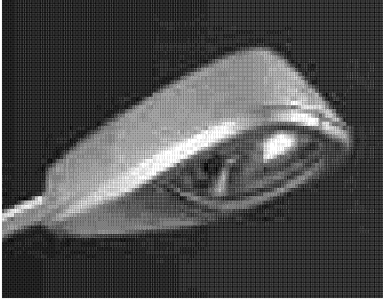

**Our MH CompuBallast® - Saves Energy!**

Designed to replace electro-magnetic ballasts with advanced Electronic Ballasts and save energy – 26% plus.  
The igniter and capacitor eliminated for extra saving.  
Our electronic ballasts incorporate the latest IC technology.

This *CBM90100U* Universal Voltage electronic ballast is designed for MH 100W M90 lamp. Compliant with c(UL)us, c(CSA)us and CE standards.

*26% Plus Savings*

*Reliable Product*

***CBM90100U***

Universal Voltage eBallast for *MH 100W M90 lamp*

---

**How much can you save?  $\Sigma(kWh+maintenance+igniter+...)$**

MH electronic ballast for 100W, M90 lamp  
Universal Input voltages = 95V to 265V at 50/60Hz  
Ballast input = 100W; output = 90W  
Lamp Current Crest Factor = 1.55  
Ballast factor (BF) = 0.99  
Aluminum enclosure 0.04"AWG  
Enclosure size = 7.8"L x 2.4"W x 1.9"H; Wt=1.2Lb.  
Accommodates variations in lamp voltage  
Permits re-lamping without damage to lamp or ballast  
Minimum starting temperature = -30C

Power Factor > 0.99  
THD < 0.05  
Energy saving = 26% plus.  
(compared with Magnetic)  
Type 1 Outdoor - Encapsulated  
Extends Lamp Life  
Mounting holes = 8.4" apart  
No Buzz, No Flicker  
Constant Lumen Output

**36 Months Limited Replacement Warranty**

---

12/01/2007

we reserve the rights to make changes without prior notice

Established 1976

Call us for price quotation & lead times

**COMPUCHARGE INC.**

Tel: 514-483-4356 Fax: 514-483-5985 E-Mail: [info@compucharge.com](mailto:info@compucharge.com)