


COMPUBALLAST®: Best energy saving eBallasts
Universal Voltage 95 to 265V Energy Miser
Electronic Ballasts for 70W MH Lamps.

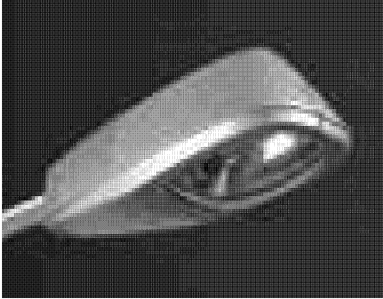

Our MH CompuBallast® - Saves Energy!

Designed to replace electro-magnetic ballasts with advanced Electronic Ballasts and save energy – 33% plus.
The igniter and capacitor eliminated for extra saving.
Our electronic ballasts incorporate the latest IC technology.

This CBM9870U Universal Voltage electronic ballast is designed for MH 70W M98 lamp. Compliant with c(UL)us, c(CSA)us and CE standards.

33% Plus Savings

Reliable Product

CBM9870U

Universal Voltage eBallast for MH 70W M98 lamp

How much can you save? $\Sigma(kWh+maintenance+igniter+...)$

MH electronic ballast for 70W, M98 lamp
Universal Input voltages = 95 to 265V at 50/60Hz
Ballast input = 70W; output = 63W
Lamp Current Crest Factor = 1.55
Ballast factor (BF) > 0.99
Aluminum enclosure 0.04"AWG
Enclosure size = 7.8"L x 2.4W" x 1.9"H; Wt=1.2Lb.
Constant Lumen output with variations in line voltage
Permits relamping without damage to lamp or ballast

Power Factor > 0.99
THD < 0.05
Energy saving = 33% plus
(compared with Magnetic)
Type 1 Outdoor - Encapsulated
Extends Lamp Life
Mounting holes = 8.4" apart
No Buzz, No Flicker
Constant Lumen Output

36 Months Limited Replacement Warranty

12/01/2007

we reserve the rights to make changes without prior notice

Established 1976

Call us for price quotation & lead times

COMPUCHARGE INC.

Tel: 514-483-4356 Fax: 514-483-5985 E-Mail: info@compucharge.com